Product Image

Specification

- Size: 86Lx86Wx28(mm)
- Input : DC12V
- Contact rating: 1A@30VDC
- Output contact: NO\NC\COM
- Mechanical life: 1,000,000 tests
- Suitable for door: Hollow Door
- Detection range: 5-20cm(Adjustable)
- Time delay: 1~25s(Adjustable)
- Current: Standby 40mA, Action 70mA
- Operating temp: -20℃～+55℃(-4-131F)
- Suitable humidity: 0-95% (relative humidity)

  LED Indicator:

  Red LED indicator: Power ON(standby)

  Green LED indicator: Power ON(sensation)
- Material: Stainless
- Weight: 0. 14kg

Installation & Size

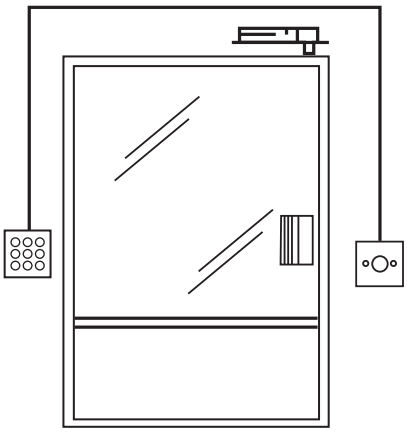

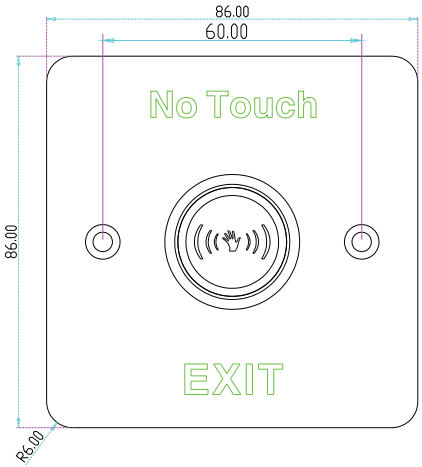

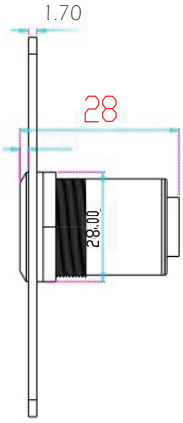

Installation

Time Delay:0.3S-30S

Turn left short

Turn right long





Detection range:5-20cm(Adjustable)

Turn left near

Turn right far